

PCT

WORLD INTELLECTUAL PROPERTY
ORGANIZATION
International I



INTERNATIONAL APPLICATION PUBLISHED UNDER

WO 9608935A1

(51) International Patent Classification 6 :

H04Q 7/24

A1

(11) International Publication Number:

WO 96/08935

(43) International Publication Date:

21 March 1996 (21.03.96)

(21) International Application Number: PCT/GB95/02131

(22) International Filing Date: 8 September 1995 (08.09.95)

(30) Priority Data:

9418772.1

16 September 1994 (16.09.94) GB

(71) Applicant (for all designated States except US): IONICA INTERNATIONAL LIMITED [GB/GB]; Cowley Road, Cambridge CB4 4AS (GB).

(72) Inventors; and

(75) Inventors/Applicants (for US only): ALBROW, Richard, John [GB/GB]; 27 Lonsdale, Linton, Cambridge CB1 6LT (GB). BLACK, Simon, Alexander [GB/GB]; 52 Auckland Court, Auckland Road, Cambridge CB5 8DS (GB). CARTER, Leigh [AU/GB]; 50 Cantelupe Road, Haslingfield, Cambridge CB3 7LU (GB). GOODINGS, Rupert, Leslie, Alexander [GB/GB]; 33 Elizabeth Way, Cambridge CB4 1DD (GB). MARTIN, Paul, Maxwell [GB/GB]; 9 Taylors Field, Dullingham, Newmarket, Suffolk CB8 9XS (GB). PIERCY, Neil, Philip [GB/GB]; 13 Harston Road, Newton, Cambridge CB2 5PA (GB).

(74) Agent: HOGG, Jeffery, Keith; Withers & Rogers, 4 Dyer's Buildings, Holborn, London EC1N 1JT (GB).

(81) Designated States: AM, AT, AU, BB, BG, BR, BY, CA, CH, CN, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IS, JP, KE, KG, KP, KR, KZ, LK, LR, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TT, UA, UG, US, UZ, VN, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG), ARIPO patent (KE, MW, SD, SZ, UG).


Published

With international search report.


Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.

(54) Title: TRANSMISSION OF CONTROL MESSAGES IN DIGITAL TELEPHONY

INCREASING PRIORITY
FOR EACH BEARER

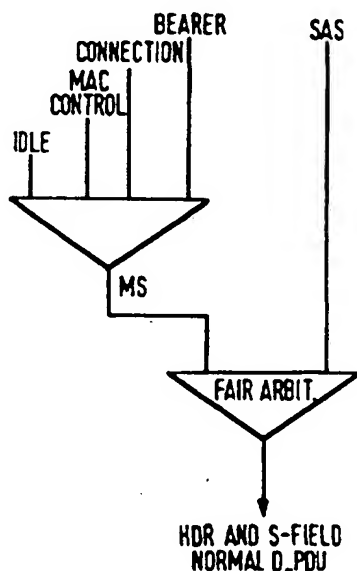

INCREASING PRIORITY
FOR EACH ALOHA SLOT

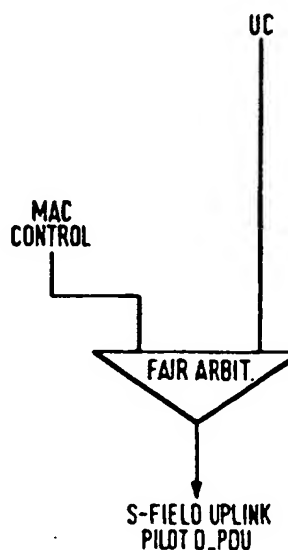

(57) Abstract

In a communications network involving transmission of data packets, control messages between are assigned priorities dependent on message type. The allocated of messages to TDM/TDMA time slots is dependent on the assignment priorities.

BEST AVAILABLE COPY

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgyzstan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LJ	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LU	Luxembourg	TD	Chad
CS	Czechoslovakia	LV	Latvia	TG	Togo
CZ	Czech Republic	MC	Monaco	TJ	Tajikistan
DE	Germany	MD	Republic of Moldova	TT	Trinidad and Tobago
DK	Denmark	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	US	United States of America
FI	Finland	MN	Mongolia	UZ	Uzbekistan
FR	France			VN	Viet Nam
GA	Gabon				

IONICA 12

Transmission of Control Messages in Digital Telephony

The invention relates to transmitting control messages in time slots within fixed length time frames, in particular, in time division multiplexing/time division multiple access (TDM/TDMA) digital telephony.

The present invention is defined in the claims to which reference should now be made.

The present invention relates to a method of transmitting control messages between nodes in a TDM/TDMA network in which control messages are assigned priorities dependent on message type, and the allocation of messages to TDM/TDMA time slots is dependent on the assigned priorities.

Each message has an assigned priority which can be designated by a value. For some messages, the associated priority value is incremented for each frame transmitted in which the message is of too low a priority to be sent.

The method is particularly applicable where a plurality of control messages are to be sent via a shared TDM/TDMA link. The various types of messages can be, for example, page requests, channel allocations, information/status requests, and a filling (idle) signal.

The present invention also relates to a TDM/TDMA transmitter including assignment means operative to assign priorities to control messages, and allocation means operative

to assign the messages to TDM/TDMA time slots for transmission.

The node or transmitter can be a base station or a subscriber unit.

A preferred embodiment of the invention will now be described, by way of example, with reference to the drawings in which:

Figure 1 is a schematic diagram illustrating the system including a base station (BTE - Base Terminating Equipment) and subscriber unit (NTE - Network Terminating Equipment);

Figure 2 is a diagram illustrating frame structure and timing for a duplex link;

Figure 3 is a schematic illustration of control message prioritisation in normal data packets for transmission in respective time slots; and

Figure 4 is a schematic illustration of control message prioritisation in uplink pilot packets for transmission in respective time slots.

The Basic System

As shown in Figure 1, the preferred system is part of a telephone system in which the local wired loop from exchange to subscriber has been replaced by a full duplex radio link between a fixed base station and fixed subscriber. The preferred system includes the duplex radio link, and transmitters and receivers for implementing the necessary protocol.

There are similarities between the preferred system and digital cellular mobile telephone systems such as GSM which are known in the art. This system uses a protocol based on a layered model, in particular the following layers: PHY (Physical), MAC (Medium Access Control), DLC (Data Link Control), NWK (Network).

One difference compared with GSM is that, in the preferred system, subscriber units are at fixed locations and there is no need for hand-off arrangements or other features relating to mobility. This means, for example, that in the preferred system directional antennae and mains electricity can be used.

Each base station in the preferred system provides six duplex radio links at twelve frequencies chosen from the overall frequency allocation, so as to minimize interference between base stations nearby. The frame structure and timing for the duplex link is illustrated in Figure 2. Each duplex radio link comprises an up-link from a subscriber unit to a base station and, at a fixed frequency offset, a down-link from the base station to the subscriber unit. The down-links are TDM, and the up-links are TDMA. Modulation for all links is $\pi/4$ - DQPSK, and the basic frame structure for all links is ten slots per frame of 2560 bits. The bit rate is 512kbps. Down-links are continuously transmitted and incorporate a broadcast channel for essential system information. When there is no user information to be transmitted, the down-link transmissions continue to use the basic frame and slot structure and contain a suitable fill pattern.

For both up-link and down-link transmissions, there are two types of slot: normal slots which are used after call set-up, and pilot slots used during call set-up.

Each down-link normal slot comprises 24 bits of synchronisation information followed by 24 bits designated S-field which includes an 8 bit header, followed by 160 bits designated D-field. This is followed by 24 bits of Forward Error Correction, and an 8 bit tail, followed by 12 bits of broadcast channel.

The broadcast channel consists of segments in each of the slots of a frame which together form the down-link common signalling channel which is transmitted by the base station, and contains the control messages containing link information such as slot lists, multi-frame and super-frame information, connectionless messages, and other information basic to the operation of the system.

The D-field may contain either I, or FAS channel data, and the S-field may contain either MS or SAS channel data. I denotes information data, which in the case of normal telephone use is digital speech but can also be other digital data such as fax/modem communications and ISDN data. MS, FAS and SAS are system control messages of which the MS messages tend to be for call set-up and control of MAC protocol. Slow associated signalling SAS tends to be used for in-call system control, and associated signalling FAS messages are sent for rapid call set-up when no information data I is yet being sent.

During call set-up, each down-link pilot slot contains frequency correction data and a training sequence for receiver initialisation, with only a short S-field and no D-field information.

Up-link slots basically contain two different types of data packet. The first type of packet, called a pilot packet, is used before a connection is set-up, for example, for an ALOHA call request and to allow adaptive time alignment. The other type of data packet, called a normal packet, is used when a call has been established and is a larger data packet, due to the use of adaptive time alignment.

Each up-link normal packet contains a data packet of 244 bits which is preceded and followed by a ramp of 4 bits duration. The ramps and the remaining bits left of the 256 bit slot provide a guard gap against interference from neighbouring slots due to timing errors. Each subscriber unit adjusts the timing of its slot transmissions to compensate for the time it takes signals to reach the base station. Each up-link normal data packet comprises 24 bits of synchronisation data followed by an S-field and D-field of the same number of bits as in each down-link normal slot.

Each up-link pilot slot contains a pilot data packet which is 196 bits long including 4 bit ramps defining an extended guard gap of 60 bits. This larger guard gap is necessary because there is no timing information available and without it propagation would cause neighbouring slots to interfere. The pilot packet comprises 64 bits of sync followed by 104 bits of S-field which starts with an 8 bit header and finishes with a 16 bit Cyclic Redundancy Check, 2 reserved bits, 14 FEC bits, and 8 tail bits. There is no D-field.

The S-field of an up-link pilot packet can contain a short information message, known as an up-link connectionless UC message. The S-field down-link can include a short information message of a so-called down-link connectionless DC message.

Provision is made in the preferred system for subscriber unit authentication using a challenge response protocol. General encryption is provided by combining the speech or data with a non-predictable sequence of cipher-bits produced by a key stream generator which is synchronised to the transmitted superframe number.

In addition, the transmitted signal is scrambled to remove dc components.

Multiplexing of Control Messages

Signalling messages from two or more sources which share a common communications channel are multiplexed by assigning priorities to the messages and transmitting in each frame the message which has the highest priority. Unsent messages can selectively have their priority incremented each frame until they are sent. In this way the available bandwidth is shared between the different message sources in some predetermined way, however all of the bandwidth is available to any one source if there is no traffic from the others.

This technique is used to multiplex MS signals (known as MAC Signalling) with data segments of higher layer frames i.e. SAS messages. The MS messages have a fixed priority depending on their type whereas SAS data segments have their priority incremented for each frame that they remain unsent. If neither MAC Signalling nor an SAS data segment is available then a fill message (MS-Idle) is sent.

Prioritisation Scheme for MS and SAS Control Messages

Normal packets may carry either MS or SAS control messages.

The Prioritisation Scheme is designed to ensure that message sources are given fair shares of the available bandwidth. However, all of the bandwidth can be available to any one source if there is no traffic from the others.

The rules are as follows:-

1. The multiplexer has 4 input queues, one for each category of MS message (each one message long) and one for SAS (one segment long).
2. MS messages are given a fixed priority.
3. SAS segments are given an initial priority value which is then incremented by 2 for each bearer for which it has been delayed.
4. The multiplexer transmits on each available bearer the message with the highest priority which may be transmitted on that bearer unless 16 consecutive segments have been transmitted on that bearer.
5. If 16 consecutive SAS segments have been sent on any bearer and there is no other MS message to send then the message MS-Idle-2 shall be sent on that bearer.

Priorities are assigned as shown in Table 1.

Bearer related	8
Connection related	6
MAC control	4
SAS segment	1 (initial priority)

Table 1: MS / SAS Priorities

The prioritisation of these different message types is illustrated schematically in Figure 3.

Prioritisation Scheme for MS and UC messages in pilot packets.

Uplink Pilot packets sent in aloha slots may carry either MS system control messages or UC (so-called uplink connectionless) messages.

The Prioritisation Scheme is designed to ensure that message sources are given fair shares of the available bandwidth. However, all of the bandwidth can be available to any one source if there is no traffic from the others.

The rules are as follows:

1. The multiplexer has 2 input queues, one for MS and one for UC messages (each one message long).
2. MS messages are given a fixed priority;

3. UC messages are given an initial priority value which is then incremented by 2 whenever an MS message is passed to the Aloha protocol.
4. The multiplexer passes to the contention protocol the message with the highest priority.

Priorities are assigned as shown in Table 2:

MAC control = MS message	4
UC message	1 (initial priority)

Table 2: MS / UC Priorities

The prioritisation of these different message types is illustrated in Figure 4. A subscriber unit (NTE) is able to access at least one aloha slot. Subscriber units may be able to access more than one aloha slot per frame provided the random access rules are obeyed.

Priorities given to MS and DC messages in the Broadcast Channel.

Broadcast down-link MS signalling is multiplexed on the Broadcast channel with the down-link connectionless DC signals. In consequence, the Broadcast channel may contain addressed messages and/or system broadcast messages. For terminals operating in low duty cycle mode any addressed messages must be sent in the appropriate frame within the

multiframe.

In the Broadcast channel, MS messages are labelled as follows:

- A Page-Request
 Multi-bearer-Page-Request
- B Ch-Alloc
 Resource-Request-Ack
- C DC logical channel
- D Slot-List
- E System broadcast messages
 [Cipher-frame
 Carrier-Info]
- F MS-Idle-B

Messages in categories A and C when used to address subscribers in Low Duty Cycle operation must be sent in the correct frame in the multiframe corresponding to the paging group of the base station. Messages in category B may be sent in any frame.

Only frames 0 through 7 may be used for paging groups for subscribers in Low Duty Cycle operation.

A subscriber in paging group M need only listen to frame M of each multiframe for messages in categories A and C.

The priority of the broadcast MS messages and of data on the DC channel is shown in Table 3.

Frame number (in multiframe)	Message 1 Priority order	Message 2 Priority Order
0 - 7	A _m , C _m , A,B,C,D	A _m , C _m , A,D
8 - 9	A,D	D
10 - 11	A,B,C,D	A,D
12-13	A,D	D
14	A,B,C,F	A,F
15	E	-

Table 3: Broadcast Priority Table

Notes:

1. As they are 10 octets long the Ch-Alloc and Multi-bearer-Page-Request messages and DC logical channel messages can only appear as Message 1 and in frames where they are used there shall be no Message 2.
2. As they are 10 octets long the Ch-Alloc and Multi-bearer-Page-Request messages and the DC logical channel messages may not appear in frames 8,9,12 or 13 so as to guarantee the contents of the second message.
3. The slot list is guaranteed to appear in at least frames 8,9,12 and 13.

4. System broadcast information is guaranteed to appear at least in frame 15.

The message MS-Idle-B is used only when no other message is available.

Messages in priorities A, B and D are addressed to subscriber units. Page-Request and the control messages when used to address subscriber units in the low duty cycle mode must be sent in the correct frame in the multiframe. Channel allocation (Ch-Alloc) may be sent in any frame.

Except for slot-list messages, when two MS messages are sent in a frame the second message does not repeat the first, for example, a Broadcast data unit may contain two Page-Request messages but only if these are addressed to different subscriber units.

MS messages are 5 octets of binary bits except Multi-bearer-Page-Request and Ch-Alloc messages which are 10 octets in length. DC messages are also 10 octets.

Only frames 0 through 7 of the 16 frame multiframe may be used for paging groups of subscriber units that are in low duty cycle operation. Low duty cycle operation allows a subscriber unit to remain in a state ready to receive a call, whilst conserving power.

CLAIMS

1. A method of transmitting control messages in time slots within fixed length time frames in which control messages are assigned priorities dependent on message type, and the messages are allocated to time slots dependent on the assigned priorities.
2. A method of transmitting control messages according to claim 1, in which each message has an assigned priority designated by a value.
3. A method of transmitting control messages according to claim 2, in which for selected message type(s), the associated priority values are incremented for each frame in which another higher priority message is sent.
4. A method of transmitting control messages according to any preceding claim which data constituting a control message is allocated to predetermined portions of at least one time slot.
5. A method of transmitting control messages according to any preceding claim, in which control messages are transmitted from a subscriber unit to a base station.
6. A method of transmitting control messages according to claim 5, in which for transmission in time slots after adaptive time alignment of transmissions between the subscriber unit and the base station a call set-up control message (MS) is given a predetermined priority and an in-call control message (SAS) is given a predetermined priority incremented for each frame for which the in-call control message (SAS) is unsent.

7. A method according to claim 6, in which MS messages include bearer related messages, connection related messages, and Medium Access Control (MAC) messages.

8. A method according to claim 7, in which a bearer related message is assigned a priority value of 8, a connection related message is assigned a priority value of 6, a Medium Access Control (MAC) is given a priority value of 4, and in-call control messages are given an initial priority value of 1.

9. A method according to any of claims 6 to 8, in which the priority value of an unsent in-call control message (SAS) is increment by 2 every frame.

10. A method of transmitting control messages according to claim 5, in which for transmission in time slots before adaptive time alignment of transmissions between the subscriber unit and the base station, control messages include a call set up control message (MS) and a data message (UC).

11. A method of transmitting control messages according to any preceding claim, in which frames are grouped into a repeating sequence (multiframe) of frame groupings, messages having priorities dependent on which is the current frame grouping.



12. A method according to claim 11, in which control messages are sent from base station to subscriber unit, a selected type of message being sent only in selected frame grouping(s).

13. A method according to claim 13, in which paging messages are only sent in frame groupings for which the subscriber unit is expecting a possible paging message.
14. A method according to claim 13, in which paging messages are sent in any of frames 0 to 7 of a sixteen frame repeating sequence.
15. A method according to claim 13 or claim 14, in which paging messages are only expected by a subscriber unit in low duty cycle mode.
16. A method of transmitting control messages according to any of claims 11 to 15, in which aloha slot messages are only transmitted in selected frames groupings of the repeated sequence.
17. A method of transmitting control messages according to any preceding claim, in which transmissions are by radio.
18. A transmitter for transmitting data packets in time slots within fixed length time frames including assignment means operative to assign priorities to control messages, and allocation means operative to assign the messages to time slots for transmission dependent upon the assigned priorities.
19. A transmitter according to claim 18, comprising a base station which transmits data packets in time division multiplex format and receives data packets in time division multiple access format.

20. A transmitter according to claim 19, comprising a subscriber unit at a fixed location which transmits data packets and in time division multiple access format and receives data packets in time division multiplex format.

21. A method of transmitting digital data messages in time slots within fixed length time frames, in which control messages are assigned priorities dependent on control message type, and the control messages are allocated to time slots for transmission dependent on assigned priorities.

1/2

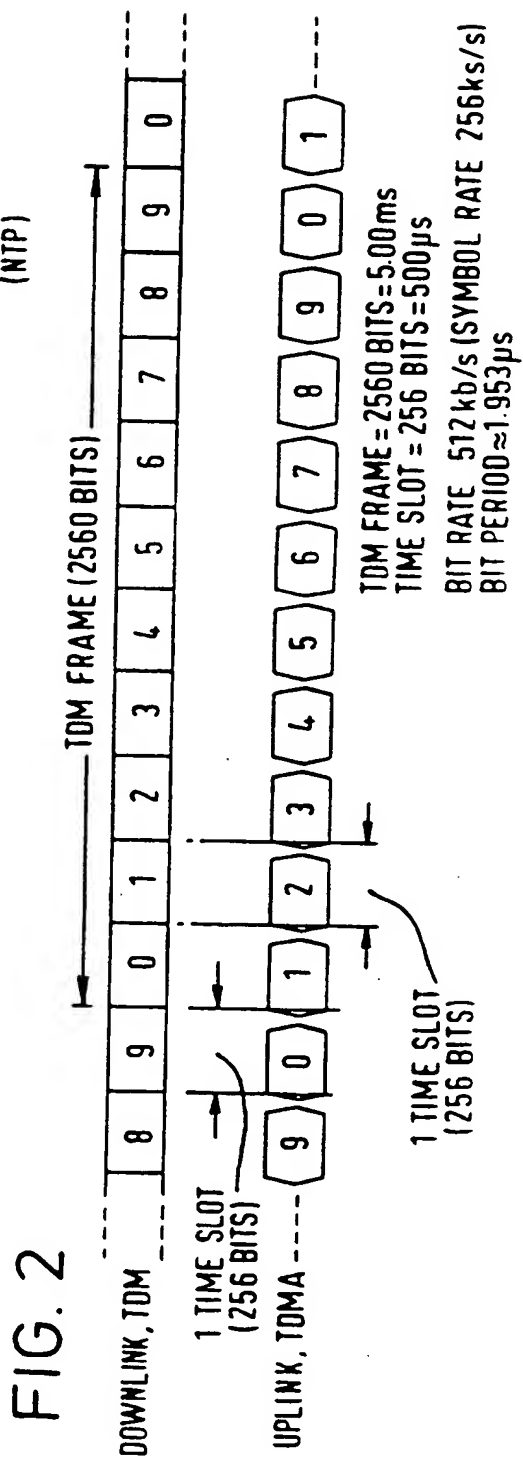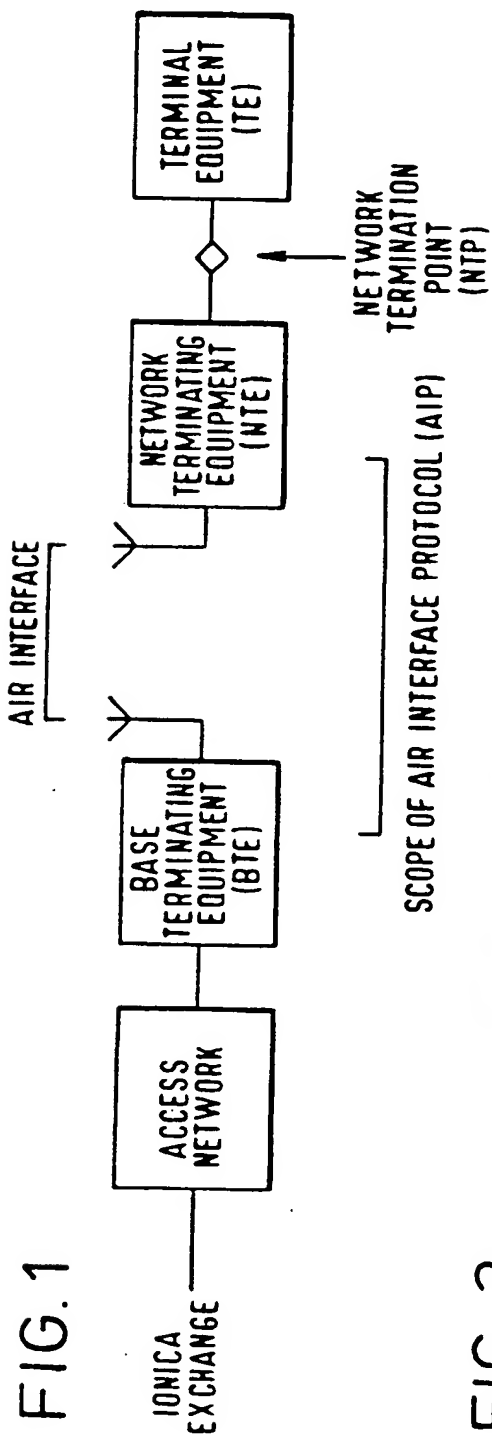

2 / 2

FIG. 3

INCREASING PRIORITY
FOR EACH BEARER


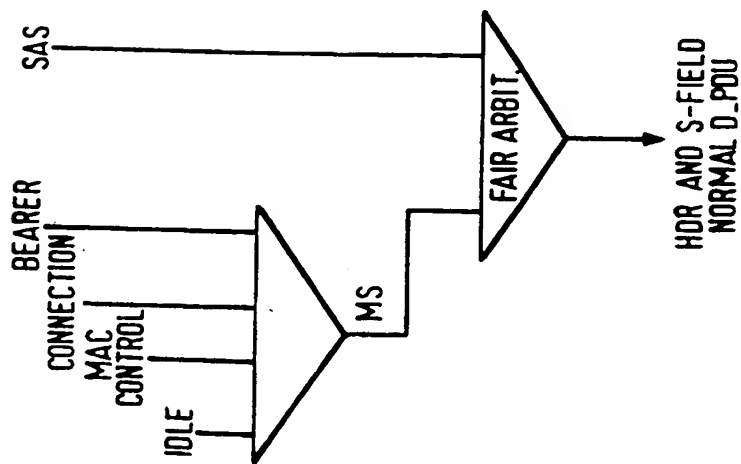


FIG. 4

INCREASING PRIORITY
FOR EACH ALOHA SLOT

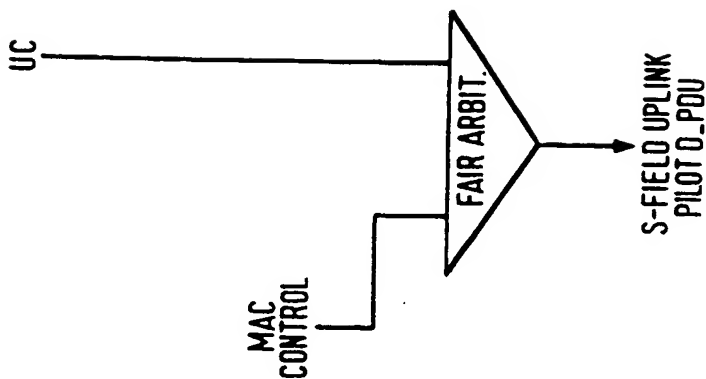

INTERNATIONAL SEARCH REPORT

International Application No.

PCT/GB 95/02131

A. CLASSIFICATION OF SUBJECT MATTER
IPC 6 H04Q7/24

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 H04Q H04B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP,A,0 545 533 (AMERICAN TELEPHONE AND TELEGRAPH COMPANY) 9 June 1993	1,2,4,5, 10, 17-19,21
A	see page 6, line 51 - page 7, line 45 ---	3,20
A	EP,A,0 285 522 (THOMSON-CSF) 5 October 1988 see column 2, line 24 - column 3, line 7 -----	1,2,4,5, 17-19,21

☐ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"Z" document member of the same patent family

Date of the actual completion of the international search

6 February 1996

Date of mailing of the international search report

20.02.96

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel: (+31-70) 340-2040, Tx. 31 651 epo nl;
Fax: (+31-70) 340-3016

Authorized officer

Behringer, L.V.

INTERNATIONAL SEARCH REPORT

International Application No
PCT/GB 95/02131

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP-A-0545533	09-06-93	CA-A- 2075022 JP-A- 5252101 US-A- 5371780	02-05-93 28-09-93 06-12-94
EP-A-0285522	05-10-88	FR-A- 2613561 DE-A- 3876470	07-10-88 21-01-93

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☒ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.